

PRODUCT RANGE

This publication provides details of the following types of electric cables:

Control Cables with copper conductors, XLPE or PVC insulated, covering sizes from 1.5 mm² up to 10 mm², in 2, 3 and 4 cores.



Auxiliary Cables with copper conductors, XLPE or PVC insulated, covering sizes from 1.5 mm², 2.5 mm², 4 mm² from 5 cores to 48 cores.

Construction details in this publication pertain to Auxiliary cables with the standard number of cores (ie. 7, 12, 19, 27, 37 or 48). However, enquiries for other number of cores can be considered.



The cables conform to the following cable specification, as applicable:

BS 5467 specification for XLPE insulated Armoured cables, rated 600/1000V.

BS 6346 specification for PVC insulated Armoured cables, rated 600/1000V.

IEC 60502-1 specification for PVC or XLPE insulated Unarmoured cables, rated 600/1000V.

XLPE insulated LSF sheathed cables with “low smoke and fume” emission characteristics as per BS 6724 specification can also be manufactured and these have similar dimensional features as cables to BS 5467.

Armoured Control and Auxiliary cables, can be offered to IEC 60502-1 specifications where required. Details are available upon request.

Control and Auxiliary cables, both armoured and unarmoured, can be offered with a common/overall screen or shield. The screening material is plain annealed copper tape / copper laminate / Aluminium laminate as specified.

CONSTRUCTION

Conductors

The conductors are bunched seven wire strands, made from high conductivity plain annealed copper wires and meet the requirements of BS 6360 specification for “Conductors in insulated cables and cords” and also IEC 60228 specification.

These cables can also be offered with single strand, solid copper conductors in sizes up to 2.5 mm².

Insulation

According to its particular standard specification, a cable will be insulated with either:

XLPE (Cross-linked polyethylene) or
PVC (Polyvinyl Chloride).

PVC is a clean, easy to handle material with good electrical characteristics and reasonable resistance to a range of oils and chemicals. It is inherently flame retardant and is suitable for a maximum continuous operating temperature of 70°C. XLPE is not flame retardant but matches all of the other attributes of PVC and at higher temperatures the toughness and physical properties are improved. In particular there is greatly enhanced resistance to deformation. This enables the conductors of XLPE insulated cables to operate at a maximum continuous temperature of 90°C, which imparts an important advantage when considering current ratings and is of particular significance in countries and installation sites where the ambient temperature is relatively high.

Core Identification

Core identification is as follows unless otherwise specified:

| Number of cores | Core Identification |
|--------------------------------|---|
| <u>Control Cables</u> | |
| Two | Red, Black |
| Three | Red, Yellow, Blue |
| Four | Red, Yellow, Blue, Black |
| <u>Auxiliary Cables</u> | |
| Five and more | White cores with number printing in black |

Cables to new colour scheme of BS5467 eg. Blue, Brown, Black, Grey could also be supplied on special request.

Fillers

Wherever necessary, non-hygroscopic polypropylene fillers are applied in the interstices of multicore cables during laying up.

Bedding

The bedding normally consists of a layer of extruded PVC for cables to BS 5467 and BS 6346. The material is a special halogen-free compound in the case of LSF cables to BS 6724.

Armour

The armour is a single layer of galvanised steel wires. The direction lay of the armour is left hand and the size of the armour-wires is as specified in the cable standard specification. See Tables 1 and 2 for armour wire diameter.

Finish

The standard finish of all cables consists of an extruded black PVC oversheath, the external surface of which is embossed with the appropriate legend. The oversheath PVC grade is usually Type TM 1 or Type 9 to BS 7655 although other grades, e.g., Type 5 (85°C Hard) PVC or PVC sheath with anti-termite properties can be provided when specified. The PVC grade is ST2 for cables conforming to IEC 60502-1 standard.

Another option is medium density polyethylene (MDPE) sheath where abrasion resistance is important or where the cable is to be buried in a waterlogged area.

PVC is intrinsically flame retardant and all cables described in this publication conform to IEC 60332-1 "Test on Electric Cables under Fire Conditions". For special enquiries, PVC with high oxygen index, specially formulated for enhanced fire performance can be considered.

In the case of LSF cables to BS 6724 the material is a special halogen-free compound. LSF cables meet the requirements of IEC 60332-3-24 Cat-C for reduced flame propagation and do not emit smoke or acid fumes when exposed to fire.

CURRENT RATINGS (AC)

XLPE INSULATED CABLES

(Maximum conductor temperature 90°C)

Installed in free air (Reference Method 11 on cable tray or Method 13 in free air, IEE Wiring Regulations.

Table 7

| Nominal area of Conductor mm ² | Two core | | Three and Four core | |
|--|-----------------------|-----------------------------------|-----------------------|-----------------------------------|
| | Current rating amp | Volt drop per amp per metre mV | Current rating amp | Volt drop per amp per metre mV |
| 1.5 | 29 | 31 | 25 | 27 |
| 2.5 | 39 | 19 | 33 | 16 |
| 4 | 52 | 12 | 44 | 10 |
| 6 | 66 | 7.9 | 56 | 6.8 |
| 10 | 90 | 4.9 | 78 | 4.0 |

Ratings based on Ambient air temp 30°C

Laid directly in ground, run in single-way ducts

Table 8

| Nominal area of Conductor mm ² | Two core | | | Three and Four core | | |
|--|------------------|----------------|-----------------------------------|---------------------|----------------|-----------------------------------|
| | Current rating | | Volt drop per amp per metre mV | Current rating | | Volt drop per amp per metre mV |
| | In ground amp | In duct amp | | In ground amp | In duct amp | |
| 1.5 | 38 | 31 | 31 | 32 | 26 | 27 |
| 2.5 | 49 | 41 | 19 | 42 | 34 | 16 |
| 4 | 65 | 53 | 12 | 55 | 45 | 10 |
| 6 | 81 | 67 | 7.9 | 69 | 56 | 6.8 |
| 10 | 109 | 89 | 4.9 | 92 | 75 | 4.0 |

Ratings based on Ground temp 15°C, Soil thermal resistivity 1.2°Cm/W. Depth of laying 0.5m. All circuits thermally independent. 100mm diameter single-way ducts.

Current Ratings for cables having more than four cores are available on request.

PVC INSULATED CABLES

(Maximum conductor temperature 70°C)

Installed in free air (Reference Method 11 on cable tray or Method 13 in free air, IEE Wiring Regulations.

Table 9

| Nominal area of Conductor mm ² | Two core | | Three and Four core | |
|--|-----------------------|-----------------------------------|-----------------------|-----------------------------------|
| | Current rating amp | Volt drop per amp per metre mV | Current rating amp | Volt drop per amp per metre mV |
| 1.5 | 22 | 29 | 19 | 25 |
| 2.5 | 31 | 18 | 26 | 15 |
| 4 | 41 | 11 | 35 | 9.5 |
| 6 | 53 | 7.3 | 45 | 6.4 |
| 10 | 72 | 4.4 | 62 | 3.8 |

Ratings based on Ambient air temp 30°C

Laid directly in ground, run in single-way ducts

Table 10

| Nominal area of Conductor mm ² | Two core | | | Three and Four core | | |
|--|------------------|----------------|-----------------------------------|---------------------|----------------|-----------------------------------|
| | Current rating | | Volt drop per amp per metre mV | Current rating | | Volt drop per amp per metre mV |
| | In ground amp | In duct amp | | In ground amp | In duct amp | |
| 1.5 | 32 | 26 | 29 | 27 | 22 | 25 |
| 2.5 | 41 | 34 | 18 | 35 | 29 | 15 |
| 4 | 55 | 45 | 11 | 47 | 38 | 9.5 |
| 6 | 69 | 57 | 7.3 | 59 | 48 | 6.4 |
| 10 | 92 | 76 | 4.4 | 78 | 64 | 3.8 |

Ratings based on Ground temp 15°C, Soil thermal resistivity 1.2°Cm/W. Depth of laying 0.5m. All circuits thermally independent. 100mm diameter single-way ducts.

Current Ratings for cables having more than four cores are available on request.

RATING FACTORS

Rating factors for ambient air temperature

Table 11

| Ambient air temperature | 25°C | 30°C | 35°C | 40°C | 45°C | 50°C | 55°C |
|-------------------------|---------------|------|------|------|------|------|------|
| Cable type | Rating factor | | | | | | |
| XLPE and LSF cable | 1.02 | 1.00 | 0.96 | 0.91 | 0.87 | 0.82 | 0.76 |
| PVC cable | 1.03 | 1.00 | 0.94 | 0.87 | 0.79 | 0.71 | 0.61 |

Correction factors for Groups of Cables, installed in air

Table 12

| Arrangement of cables | Number of circuits or multicore cables | | | | | | | | | |
|--|--|------|------|------|------|------|------|------|------|--|
| | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | |
| In conduit, trunking or bunched and clipped directly | 0.8 | 0.7 | 0.65 | 0.6 | 0.57 | 0.54 | 0.52 | 0.5 | 0.48 | |
| On metal tray and cables touching | 0.86 | 0.81 | 0.77 | 0.75 | 0.74 | 0.73 | 0.73 | 0.72 | 0.71 | |

Rating factors for depth of laying (to centre of cable or to centre of duct)

Table 13

| Depth of laying m | Multicore Cables | |
|----------------------|------------------|---------------------|
| | Direct in ground | In single way ducts |
| 0.50 | 1.00 | 1.00 |
| 0.60 | 0.99 | 0.99 |
| 0.80 | 0.97 | 0.97 |
| 1.00 | 0.95 | 0.96 |
| 1.25 | 0.94 | 0.95 |

Rating factors for variation in thermal resistivity of soil (average values)

Table 14

| Type of installation | Soil thermal resistivity in °Cm/W | | | | | |
|--|-----------------------------------|------|------|------|------|------|
| | 0.8 | 0.9 | 1.0 | 1.5 | 2.0 | 2.5 |
| Multicore cables laid directly in ground | 1.09 | 1.06 | 1.04 | 0.93 | 0.84 | 0.77 |
| Multicore cables installed in single way ducts | 1.03 | 1.02 | 1.02 | 0.97 | 0.91 | 0.87 |

Rating factors for ground temperature (cables laid direct or in ducts)

Table 15

| Ground temperature | 15°C | 20°C | 25°C | 30°C | 35°C | 40°C | 45°C |
|--------------------|------|------|------|------|------|------|------|
| XLPE insulated | 1.0 | 0.97 | 0.93 | 0.89 | 0.86 | 0.82 | 0.76 |
| PVC insulated | 1.0 | 0.95 | 0.90 | 0.85 | 0.80 | 0.74 | 0.67 |

Group rating factors for multicore cables in horizontal formation (average values)

Table 16


| | Number of cables in group | Spacing between cable centres | | | | |
|----------------------------|---------------------------|-------------------------------|-------|------|-------|------|
| | | Touching | 0.15m | 0.3m | 0.45m | 0.6m |
| Cables direct in ground | 2 | 0.81 | 0.87 | 0.91 | 0.93 | 0.94 |
| | 3 | 0.70 | 0.78 | 0.84 | 0.87 | 0.90 |
| | 4 | 0.63 | 0.74 | 0.81 | 0.86 | 0.89 |
| | 5 | 0.59 | 0.70 | 0.78 | 0.83 | 0.87 |
| | 6 | 0.55 | 0.67 | 0.76 | 0.82 | 0.86 |
| Cables in single way ducts | 2 | 0.90 | | 0.93 | 0.95 | 0.96 |
| | 3 | 0.82 | | 0.87 | 0.90 | 0.93 |
| | 4 | 0.78 | | 0.85 | 0.89 | 0.91 |
| | 5 | 0.76 | | 0.82 | 0.87 | 0.90 |
| | 6 | 0.72 | | 0.81 | 0.86 | 0.90 |

SHORT CIRCUIT RATINGS

XLPE Insulated Cables

The values of fault current given in the graph are based on the cable being fully loaded at the start of the short circuit (conductor temperature 90°C) and a final conductor temperature of 250°C. It should be ensured that the accessories associated with the cable are also capable of operation at these values of fault current and temperature.


Copper Conductors

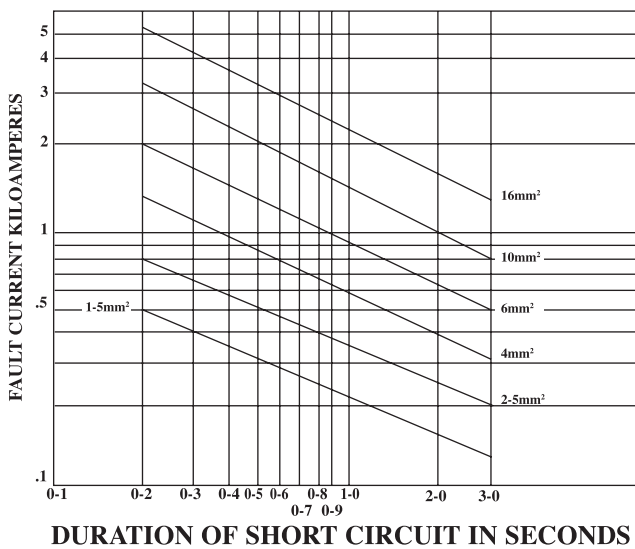

PVC Insulated Cables

The values of fault current given in the graph are based on the cable being fully loaded at the start of the short circuit (conductor temperature 70°C) and a final conductor temperature of 160°C.

Copper Conductors

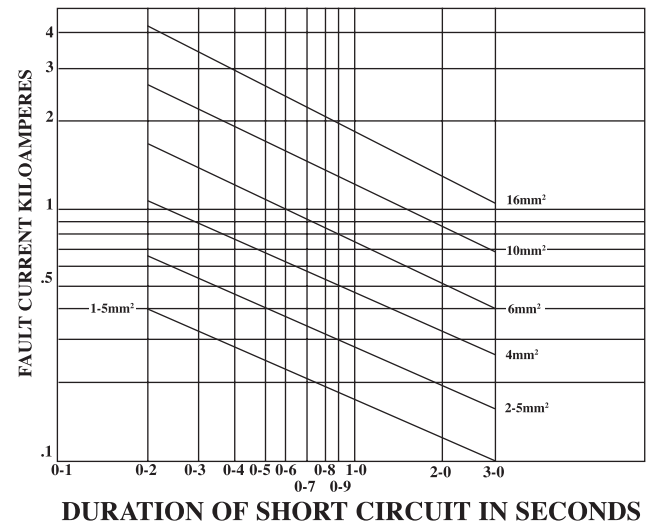

INSTALLATION

Environment

All the cables described in this publication can be used indoors or outdoors, but some reservations are necessary concerning cables without armour for direct burial e.g.:

- (i) Unarmoured cables are not recommended for laying directly in the ground;
- (ii) Cables laid directly in the ground, particularly in sustained wet conditions, should have extruded bedding;
- (iii) For installations where there is water-logging or where it is likely to occur, advice should be obtained from our technical department. It may be desirable to recommend an alternative type of outersheath for the cable (e.g. MDPE).

Cable support spacing

The following tables are for XLPE and PVC insulated cables to BS 5467 and BS 6346. They are, where possible, in line with the IEE Wiring Regulations.

Copper conductor cables

Table 17

| Overall cable diameter mm | Support spacing | |
|------------------------------|------------------|----------------|
| | Horizontal mm | Vertical mm |
| Below 15 | 350 | 450 |
| 15 to less than 20 | 400 | 550 |
| 20 to less than 40 | 450 | 600 |
| 40 to less than 60 | 700 | 900 |

Minimum Bending Radius

Table 18

| Type of cable | Minimum Bending Radius | |
|--|------------------------|-------------------------------------|
| | During installation | Adjacent to joints and terminations |
| BS 5467, BS 6346 & IEC 60502-1 Circular copper conductor | 6 D | 6 D |

Note: The minimum bending radius for LSF cables to BS 6724 is 8 times the overall diameter.

XLPE INSULATED CABLES TO BS 5467 & IEC - 60502 - 1

DIMENSIONS AND WEIGHTS



STRANDED COPPER & ALUMINIUM CONDUCTORS TWO CORE CABLES

600/1000 V *UNARMoured AND ARMoured, PVC SHEATHED CABLES

| Nominal area of conductor mm ² | Thickness of insulation mm | Unarmoured Cables (approximate values) | | | Armoured Cables (approximate values) | | | | |
|---|----------------------------|--|------------------------------|---------------------------|--------------------------------------|---------------------------|---------------------------|------------------------------|---------------------------|
| | | Cable diameter overall mm | Cable weight Aluminium kg/km | Cable weight Copper kg/km | Diameter under armour mm | Armour** wire diameter mm | Cable diameter overall mm | Cable weight Aluminium kg/km | Cable weight Copper kg/km |
| 16* | 0.7 | 17.0 | - | 475 | 15.2 | 1.25 | 20.4 | - | 900 |
| 25* | 0.9 | 20.2 | 415 | 740 | 18.5 | 1.25 | 24.1 | 915 | 1240 |
| 35* | 0.9 | 22.5 | 480 | 955 | 21.5 | 1.60 | 27.7 | 1255 | 1710 |
| 50 | 1.0 | 20.4 | 497 | 1100 | 18.7 | 1.60 | 25.8 | 1430 | 1800 |
| 70 | 1.1 | 23.1 | 690 | 1520 | 21.5 | 1.60 | 29.0 | 1780 | 2320 |
| 95 | 1.1 | 26.5 | 850 | 2050 | 24.6 | 2.00 | 33.1 | 1950 | 3150 |
| 120 | 1.2 | 28.4 | 1170 | 2610 | 26.8 | 2.00 | 36.1 | 2440 | 3880 |
| 150 | 1.4 | 31.7 | 1450 | 3220 | 29.7 | 2.00 | 39.3 | 3050 | 4820 |
| 185 | 1.6 | 35.1 | 1810 | 4030 | 33.3 | 2.50 | 44.7 | 3690 | 5920 |
| 240 | 1.7 | 40.3 | 2280 | 5200 | 38.1 | 2.50 | 49.0 | 4380 | 7300 |
| 300 | 1.8 | 44.3 | 2760 | 6430 | 42.3 | 2.50 | 53.5 | 5100 | 8770 |

* Circular conductor, all others are sector shaped.

Note: Unarmoured cables & cables with Stranded Aluminium Conductors conform to IEC 60502 - 1

CURRENT RATINGS (AC)

STRANDED COPPER & ALUMINIUM CONDUCTORS – TWO CORE CABLES

600/1000 V ARMoured PVC SHEATHED CABLES

| Nominal area of conductor mm ² | Stranded Copper Conductors | | | | | | Aluminium Conductors | | | | | |
|---|----------------------------|--------------------------|-----------------------|---|---------|--------|-----------------------|--------------------------|-----------------------|---|---------|--------|
| | Current Ratings | | | Approximate voltage drop per ampere per metre | | | Current Ratings | | | Approximate voltage drop per ampere per metre | | |
| | Direct in ground amps | In single way ducts amps | Installed in air amps | Ground mV | Duct mV | Air mV | Direct in ground amps | In single way ducts amps | Installed in air amps | Ground mV | Duct mV | Air mV |
| 16* | 140 | 115 | 115 | 2.9 | 2.9 | 2.9 | - | - | - | - | - | - |
| 25* | 180 | 145 | 152 | 1.9 | 1.9 | 1.9 | 135 | 110 | 112 | 3.1 | 3.1 | 3.1 |
| 35* | 215 | 175 | 188 | 1.3 | 1.3 | 1.3 | 165 | 130 | 138 | 2.2 | 2.2 | 2.2 |
| 50 | 255 | 210 | 228 | 1.0 | 1.0 | 1.0 | 195 | 155 | 166 | 1.7 | 1.7 | 1.7 |
| 70 | 315 | 260 | 291 | 0.7 | 0.7 | 0.7 | 240 | 195 | 211 | 1.1 | 1.1 | 1.1 |
| 95 | 381 | 313 | 354 | 0.5 | 0.5 | 0.5 | 288 | 237 | 254 | 0.8 | 0.8 | 0.8 |
| 120 | 410 | 344 | 430 | 0.4 | 0.4 | 0.4 | - | - | - | - | - | - |
| 150 | 472 | 384 | 480 | 0.4 | 0.4 | 0.4 | - | - | - | - | - | - |
| 185 | 539 | 432 | 540 | 0.3 | 0.3 | 0.3 | - | - | - | - | - | - |
| 240 | 632 | 504 | 636 | 0.2 | 0.2 | 0.2 | - | - | - | - | - | - |
| 300 | 708 | 560 | 732 | 0.2 | 0.2 | 0.2 | - | - | - | - | - | - |
| 800 | 888 | 692 | 1119 | 0.17 | 0.25 | 0.17 | - | - | - | - | - | - |
| 1000 | 942 | 735 | 1214 | 0.16 | 0.24 | 0.16 | - | - | - | - | - | - |

* Circular conductor, all others are sector shaped

600/1000 V UNARMoured PVC SHEATHED CABLES

| Nominal area of conductor mm ² | Stranded Copper Conductors | | | | | | Aluminium Conductors | | | | | |
|---|----------------------------|--------------------------|-----------------------|---|---------|--------|-----------------------|--------------------------|-----------------------|---|---------|--------|
| | Current Ratings | | | Approximate voltage drop per ampere per metre | | | Current Ratings | | | Approximate voltage drop per ampere per metre | | |
| | Direct in ground amps | In single way ducts amps | Installed in air amps | Ground mV | Duct mV | Air mV | Direct in ground amps | In single way ducts amps | Installed in air amps | Ground mV | Duct mV | Air mV |
| 16* | 140 | 115 | 115 | 2.9 | 2.9 | 2.9 | - | - | - | - | - | - |
| 25* | 180 | 140 | 149 | 1.9 | 1.9 | 1.9 | 135 | 105 | 108 | 3.1 | 3.1 | 3.1 |
| 35* | 215 | 170 | 185 | 1.3 | 1.3 | 1.3 | 165 | 130 | 135 | 2.2 | 2.2 | 2.2 |
| 50 | 255 | 205 | 225 | 1.0 | 1.0 | 1.0 | 195 | 150 | 164 | 1.7 | 1.7 | 1.7 |
| 70 | 315 | 255 | 289 | 0.7 | 0.7 | 0.7 | 240 | 195 | 211 | 1.2 | 1.2 | 1.2 |
| 95 | 380 | 311 | 352 | 0.5 | 0.5 | 0.5 | 285 | 235 | 257 | 0.8 | 0.8 | 0.8 |
| 120 | 410 | 344 | 430 | 0.4 | 0.4 | 0.4 | - | - | - | - | - | - |
| 150 | 473 | 384 | 480 | 0.4 | 0.4 | 0.4 | - | - | - | - | - | - |
| 185 | 542 | 432 | 540 | 0.3 | 0.3 | 0.3 | - | - | - | - | - | - |
| 240 | 641 | 504 | 650 | 0.2 | 0.2 | 0.2 | - | - | - | - | - | - |
| 300 | 741 | 560 | 750 | 0.2 | 0.2 | 0.2 | - | - | - | - | - | - |

Direct in ground - Cables touching Single way ducts - ducts touching

* Circular conductors, all others are sector shaped

Note: (1) 50mm² and above are with D-shaped conductor

(2) Unarmoured cables are as per IEC 60502 - 1

Installation conditions for above ratings:

Ambient air temperature: 30°C

Ground temperature: 15°C, Depth of laying: 0.5 m

Soil thermal resistivity: 1.2°C m/W

Maximum conductor operating temperature at rated current is 90°C

For rating factors see Tables 2 to 6 and 8 to 12

XLPE INSULATED CABLES TO BS 5467 & IEC - 60502 - 1

DIMENSIONS AND WEIGHTS



STRANDED COPPER & ALUMINIUM CONDUCTORS THREE CORE CABLES

600/1000 V *UNARMoured AND ARMoured, PVC SHEATHED CABLES

| Nominal area of conductor mm ² | Thickness of insulation mm | Unarmoured Cables (approximate values) | | | Armoured Cables (approximate values) | | | | |
|---|----------------------------|--|------------------------------|---------------------------|--------------------------------------|---------------------------|---------------------------|------------------------------|---------------------------|
| | | Cable diameter overall mm | Cable weight Aluminium kg/km | Cable weight Copper kg/km | Diameter under armour mm | Armour** wire diameter mm | Cable diameter overall mm | Cable weight Aluminium kg/km | Cable weight Copper kg/km |
| 16* | 0.7 | 18.0 | - | 675 | 16.0 | 1.25 | 21.6 | - | 1130 |
| 25* | 0.9 | 21.5 | 500 | 990 | 20.0 | 1.6 | 26.7 | 1220 | 1710 |
| 35* | 0.9 | 24.0 | 610 | 1295 | 22.7 | 1.6 | 29.4 | 1415 | 2100 |
| 25 | 0.9 | 19.9 | 440 | 900 | 18.1 | 1.6 | 23.8 | 1040 | 1530 |
| 35 | 0.9 | 21.6 | 540 | 1190 | 19.8 | 1.6 | 25.7 | 1210 | 1870 |
| 50 | 1.0 | 24.6 | 740 | 1640 | 23.0 | 1.6 | 28.5 | 1550 | 2450 |
| 70 | 1.1 | 28.0 | 1050 | 2220 | 26.0 | 1.6 | 32.2 | 1810 | 3120 |
| 95 | 1.1 | 31.0 | 1170 | 2980 | 30.0 | 2.0 | 37.0 | 2500 | 4310 |
| 120 | 1.2 | 34.8 | 1440 | 3730 | 32.8 | 2.0 | 40.4 | 2870 | 5160 |
| 150 | 1.4 | 38.5 | 2300 | 5195 | 36.8 | 2.5 | 45.5 | 3660 | 7160 |
| 185 | 1.6 | 44.0 | 2750 | 6470 | 41.5 | 2.5 | 49.8 | 4320 | 8600 |
| 240 | 1.7 | 49.5 | 3020 | 8380 | 46.0 | 2.5 | 55.1 | 5170 | 10755 |
| 300 | 1.8 | 53.5 | 3660 | 10420 | 51.5 | 2.5 | 60.2 | 6100 | 13080 |
| 400 | 2.0 | 59.2 | 3730 | 11575 | 56.4 | 2.5 | 66.6 | 7050 | 15810 |

* Circular conductors, all others are sector shaped.

Note: Unarmoured cables & cables with Stranded Aluminium Conductors conform to IEC 60502 - 1

CURRENT RATINGS (AC)

STRANDED COPPER & ALUMINIUM CONDUCTORS – THREE CORE CABLES

600/1000 V ARMOURED PVC SHEATHED CABLES

| Nominal area of conductor mm ² | Stranded Copper Conductors | | | | | | Aluminium Conductors | | | | | |
|---|----------------------------|--------------------------|-----------------------|---|---------|--------|-----------------------|--------------------------|-----------------------|---|---------|--------|
| | Current Ratings | | | Approximate voltage drop per ampere per metre | | | Current Ratings | | | Approximate voltage drop per ampere per metre | | |
| | Direct in ground amps | In single way ducts amps | Installed in air amps | Ground mV | Duct mV | Air mV | Direct in ground amps | In single way ducts amps | Installed in air amps | Ground mV | Duct mV | Air mV |
| 16 | 115 | 94 | 99 | 2.5 | 2.5 | 2.5 | 89 | 72 | 74 | 4.2 | 4.2 | 4.2 |
| 25 | 150 | 125 | 131 | 1.7 | 1.7 | 1.7 | 115 | 94 | 98 | 2.7 | 2.7 | 2.7 |
| 35 | 180 | 150 | 162 | 1.2 | 1.2 | 1.2 | 135 | 110 | 120 | 1.9 | 1.9 | 1.9 |
| 50 | 215 | 175 | 197 | 0.9 | 0.9 | 0.9 | 165 | 135 | 145 | 1.4 | 1.4 | 1.4 |
| 70 | 265 | 215 | 251 | 0.6 | 0.6 | 0.6 | 200 | 165 | 185 | 1.0 | 1.0 | 1.0 |
| 95 | 315 | 260 | 304 | 0.5 | 0.5 | 0.5 | 240 | 200 | 224 | 0.7 | 0.7 | 0.7 |
| 120 | 360 | 300 | 353 | 0.4 | 0.4 | 0.4 | 275 | 230 | 264 | 0.6 | 0.6 | 0.6 |
| 150 | 405 | 335 | 406 | 0.3 | 0.3 | 0.3 | 310 | 255 | 305 | 0.5 | 0.5 | 0.5 |
| 185 | 460 | 380 | 463 | 0.3 | 0.3 | 0.3 | 350 | 295 | 350 | 0.4 | 0.4 | 0.4 |
| 240 | 530 | 440 | 546 | 0.2 | 0.2 | 0.2 | 410 | 340 | 418 | 0.3 | 0.3 | 0.3 |
| 300 | 590 | 495 | 628 | 0.2 | 0.2 | 0.2 | 460 | 385 | 488 | 0.3 | 0.3 | 0.3 |
| 400 | 667 | 570 | 728 | 0.2 | 0.2 | 0.2 | 520 | 443 | 562 | 0.2 | 0.2 | 0.2 |

600/1000 V UNARMOURED PVC SHEATHED CABLES

| Nominal area of conductor mm ² | Stranded Copper Conductors | | | | | | Aluminium Conductors | | | | | |
|---|----------------------------|--------------------------|-----------------------|---|---------|--------|-----------------------|--------------------------|-----------------------|---|---------|--------|
| | Current Ratings | | | Approximate voltage drop per ampere per metre | | | Current Ratings | | | Approximate voltage drop per ampere per metre | | |
| | Direct in ground amps | In single way ducts amps | Installed in air amps | Ground mV | Duct mV | Air mV | Direct in ground amps | In single way ducts amps | Installed in air amps | Ground mV | Duct mV | Air mV |
| 16 | 120 | 93 | 100 | 2.5 | 2.5 | 2.5 | - | - | - | - | - | - |
| 25 | 145 | 125 | 127 | 1.7 | 1.7 | 1.7 | 115 | 92 | 97 | 2.7 | 2.7 | 2.7 |
| 35 | 180 | 145 | 158 | 1.2 | 1.2 | 1.2 | 135 | 110 | 120 | 1.9 | 1.9 | 1.9 |
| 50 | 215 | 175 | 192 | 0.9 | 0.9 | 0.9 | 165 | 135 | 146 | 1.4 | 1.4 | 1.4 |
| 70 | 265 | 215 | 246 | 0.6 | 0.6 | 0.6 | 200 | 165 | 187 | 1.0 | 1.0 | 1.0 |
| 95 | 315 | 255 | 298 | 0.5 | 0.5 | 0.5 | 240 | 195 | 227 | 0.7 | 0.7 | 0.7 |
| 120 | 365 | 300 | 346 | 0.4 | 0.4 | 0.4 | 275 | 225 | 263 | 0.6 | 0.6 | 0.6 |
| 150 | 405 | 330 | 399 | 0.3 | 0.3 | 0.3 | 310 | 255 | 304 | 0.5 | 0.5 | 0.5 |
| 185 | 465 | 380 | 456 | 0.3 | 0.3 | 0.3 | 350 | 290 | 347 | 0.4 | 0.4 | 0.4 |
| 240 | 540 | 440 | 538 | 0.2 | 0.2 | 0.2 | 415 | 340 | 409 | 0.3 | 0.3 | 0.3 |
| 300 | 600 | 500 | 621 | 0.2 | 0.2 | 0.2 | 465 | 385 | 471 | 0.3 | 0.3 | 0.3 |
| 400 | 675 | 575 | 741 | 0.2 | 0.2 | 0.2 | 523 | 443 | 570 | 0.2 | 0.2 | 0.2 |

Direct in ground - Cables touching

Single way ducts - ducts touching

* Circular conductors, all others are sector shaped

Note: Unarmoured cables are as per IEC 60502 - 1

Installation conditions for above ratings:

Ambient air temperature: 30°C

Ground temperature: 15°C, Depth of laying: 0.5 m


Soil thermal resistivity: 1.2°C m/W

Maximum conductor operating temperature at rated current is 90°C

For rating factors see Tables 2 to 6 and 8 to 12

XLPE INSULATED CABLES TO BS 5467 & IEC - 60502 - 1

DIMENSIONS AND WEIGHTS

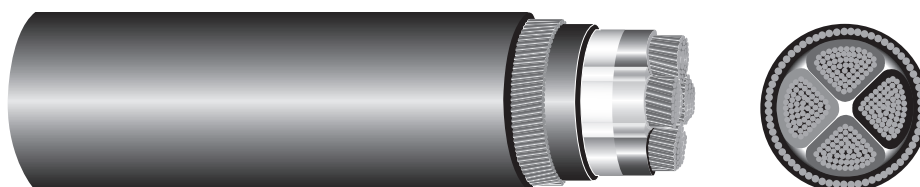

STRANDED COPPER & ALUMINIUM CONDUCTORS FOUR CORE CABLES

600/1000 V *UNARMoured AND ARMoured, PVC SHEATHED CABLES

| Nominal area of conductor mm ² | Thickness of insulation mm | Unarmoured Cables (approximate values) | | | Armoured Cables (approximate values) | | | | |
|---|----------------------------|--|------------------------------|---------------------------|--------------------------------------|---------------------------|---------------------------|------------------------------|---------------------------|
| | | Cable diameter overall mm | Cable weight Aluminium kg/km | Cable weight Copper kg/km | Diameter under armour mm | Armour** wire diameter mm | Cable diameter overall mm | Cable weight Aluminium kg/km | Cable weight Copper kg/km |
| 16* | 0.7 | 20.0 | - | 780 | 18.0 | 1.25 | 23.4 | - | 1320 |
| 25 | 0.9 | 21.0 | 520 | 1160 | 20.0 | 1.6 | 26.1 | 1200 | 1840 |
| 35 | 0.9 | 24.5 | 650 | 1540 | 22.8 | 1.6 | 28.6 | 1420 | 2310 |
| 50 | 1.0 | 26.5 | 900 | 2100 | 25.5 | 1.6 | 32.0 | 1770 | 2970 |
| 70 | 1.1 | 31.0 | 1210 | 2950 | 29.5 | 2.0 | 37.7 | 2500 | 4240 |
| 95 | 1.1 | 35.2 | 1550 | 3970 | 33.5 | 2.0 | 41.7 | 2980 | 5400 |
| 120 | 1.2 | 39.0 | 1910 | 4960 | 37.5 | 2.5 | 47.1 | 3950 | 7000 |
| 150 | 1.4 | 43.5 | 2410 | 6160 | 41.5 | 2.5 | 51.4 | 4600 | 8350 |
| 185 | 1.6 | 49.0 | 2990 | 7690 | 46.0 | 2.5 | 56.6 | 5430 | 10130 |
| 240 | 1.7 | 54.5 | 3890 | 10070 | 52.5 | 2.5 | 63.0 | 6660 | 12840 |
| 300 | 1.8 | 61.0 | 4730 | 12490 | 57.5 | 2.5 | 68.8 | 7770 | 15530 |
| 400 | 2.0 | 67.5 | 5780 | 15620 | 65.0 | 3.15 | 78.1 | 10380 | 19950 |
| 500** | 2.2 | 74.2 | 7500 | 19900 | 72.6 | 3.15 | 82.0 | 12200 | 24360 |

* Circular conductors, all others are sector shaped.

** Cable as per IEC 60502 - 1

Note: Unarmoured cables & cables with Stranded Aluminium Conductors conform to IEC 60502 - 1

CURRENT RATINGS (AC)

STRANDED COPPER & ALUMINIUM CONDUCTORS – FOUR CORE CABLES

600/1000 V ARMoured PVC SHEATHED CABLES

| Nominal area of conductor mm ² | Stranded Copper Conductors | | | | | | Aluminium Conductors | | | | | |
|---|----------------------------|--------------------------|-----------------------|---|---------|--------|-----------------------|--------------------------|-----------------------|---|---------|--------|
| | Current Ratings | | | Approximate voltage drop per ampere per metre | | | Current Ratings | | | Approximate voltage drop per ampere per metre | | |
| | Direct in ground amps | In single way ducts amps | Installed in air amps | Ground mV | Duct mV | Air mV | Direct in ground amps | In single way ducts amps | Installed in air amps | Ground mV | Duct mV | Air mV |
| 16 | 115 | 94 | 99 | 2.5 | 2.5 | 2.5 | 89 | 72 | 74 | 4.2 | 4.2 | 4.2 |
| 25 | 150 | 125 | 131 | 1.7 | 1.7 | 1.7 | 115 | 94 | 98 | 2.7 | 2.7 | 2.7 |
| 35 | 180 | 150 | 162 | 1.2 | 1.2 | 1.2 | 135 | 110 | 120 | 1.9 | 1.9 | 1.9 |
| 50 | 215 | 175 | 197 | 0.9 | 0.9 | 0.9 | 165 | 135 | 145 | 1.4 | 1.4 | 1.4 |
| 70 | 265 | 215 | 251 | 0.6 | 0.6 | 0.6 | 200 | 165 | 185 | 1.0 | 1.0 | 1.0 |
| 95 | 315 | 260 | 304 | 0.5 | 0.5 | 0.5 | 240 | 200 | 224 | 0.7 | 0.7 | 0.7 |
| 120 | 360 | 300 | 353 | 0.4 | 0.4 | 0.4 | 275 | 230 | 264 | 0.6 | 0.6 | 0.6 |
| 150 | 405 | 335 | 406 | 0.3 | 0.3 | 0.3 | 310 | 255 | 305 | 0.5 | 0.5 | 0.5 |
| 185 | 460 | 380 | 463 | 0.3 | 0.3 | 0.3 | 350 | 295 | 350 | 0.4 | 0.4 | 0.4 |
| 240 | 530 | 440 | 546 | 0.2 | 0.2 | 0.2 | 410 | 340 | 418 | 0.3 | 0.3 | 0.3 |
| 300 | 590 | 495 | 628 | 0.2 | 0.2 | 0.2 | 460 | 385 | 488 | 0.3 | 0.3 | 0.3 |
| 400 | 667 | 570 | 728 | 0.2 | 0.2 | 0.2 | 520 | 443 | 562 | 0.2 | 0.2 | 0.2 |
| 500 | 720 | 605 | 800 | 0.2 | 0.2 | 0.2 | 561 | 470 | 618 | 0.2 | 0.2 | 0.2 |

600/1000 V UNARMoured PVC SHEATHED CABLES

| Nominal area of conductor mm ² | Stranded Copper Conductors | | | | | | Aluminium Conductors | | | | | |
|---|----------------------------|--------------------------|-----------------------|---|---------|--------|-----------------------|--------------------------|-----------------------|---|---------|--------|
| | Current Ratings | | | Approximate voltage drop per ampere per metre | | | Current Ratings | | | Approximate voltage drop per ampere per metre | | |
| | Direct in ground amps | In single way ducts amps | Installed in air amps | Ground mV | Duct mV | Air mV | Direct in ground amps | In single way ducts amps | Installed in air amps | Ground mV | Duct mV | Air mV |
| 16 | 120 | 93 | 100 | 2.5 | 2.5 | 2.5 | 89 | 72 | 74 | 4.2 | 4.2 | 4.2 |
| 25 | 145 | 125 | 127 | 1.7 | 1.7 | 1.7 | 115 | 92 | 97 | 2.7 | 2.7 | 2.7 |
| 35 | 180 | 145 | 158 | 1.2 | 1.2 | 1.2 | 135 | 110 | 120 | 1.9 | 1.9 | 1.9 |
| 50 | 215 | 175 | 192 | 0.9 | 0.9 | 0.9 | 165 | 135 | 146 | 1.4 | 1.4 | 1.4 |
| 70 | 265 | 215 | 246 | 0.6 | 0.6 | 0.6 | 200 | 165 | 187 | 1.0 | 1.0 | 1.0 |
| 95 | 315 | 255 | 298 | 0.5 | 0.5 | 0.5 | 240 | 195 | 227 | 0.7 | 0.7 | 0.7 |
| 120 | 365 | 300 | 346 | 0.4 | 0.4 | 0.4 | 275 | 225 | 263 | 0.6 | 0.6 | 0.6 |
| 150 | 405 | 330 | 399 | 0.3 | 0.3 | 0.3 | 310 | 255 | 304 | 0.5 | 0.5 | 0.5 |
| 185 | 465 | 380 | 456 | 0.3 | 0.3 | 0.3 | 350 | 290 | 347 | 0.4 | 0.4 | 0.4 |
| 240 | 540 | 440 | 538 | 0.2 | 0.2 | 0.2 | 415 | 340 | 409 | 0.3 | 0.3 | 0.3 |
| 300 | 600 | 500 | 621 | 0.2 | 0.2 | 0.2 | 465 | 385 | 471 | 0.3 | 0.3 | 0.3 |
| 400 | 675 | 575 | 741 | 0.2 | 0.2 | 0.2 | 523 | 443 | 570 | 0.2 | 0.2 | 0.2 |
| 500 | 730 | 610 | 814 | 0.2 | 0.2 | 0.2 | 565 | 470 | 626 | 0.2 | 0.2 | 0.2 |

Direct in ground - Cables touching

Single way ducts - ducts touching

* Circular conductors, all others are sector shaped

Note: Unarmoured cables are as per IEC 60502 - 1

Installation conditions for above ratings:

Ambient air temperature: 30°C

Ground temperature: 15°C, Depth of laying: 0.5 m

Soil thermal resistivity: 1.2°C m/W

Maximum conductor operating temperature at rated current is 90°C

For rating factors see Tables 2 to 6 and 8 to 12